

HSF RoHS

SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:25mΩ Max
 Withstand Voltage:500V
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-55°C to +125°C





Contact Material:Phosphor Bronze
 Contact Plating:Sn and Au over Ni
 Tail Material:Phosphor Bronze
 Tail Plating: Sn over Ni
 Main Body Material: LCP UL94V0
 Cover Material:LCP UL94V0
 Resistance To Soldering Heat:
 260° C ±5° C, 10s(LCP insulator)

100	62.23	66.65	68.55	65.45	64.45	66.23
90	55.88	60.30	62.20	59.10	58.10	59.88
80	49.53	53.95	55.85	52.75	51.75	53.53
70	43.18	47.60	49.50	46.40	45.40	47.18
60	36.83	41.25	43.15	40.05	39.05	40.83
50	30.48	34.90	36.80	33.70	32.70	34.48
40	24.13	28.55	30.45	27.35	26.35	28.13
30	17.78	22.20	24.10	21.00	20.00	21.78
20	11.43	15.85	17.75	14.65	13.65	15.43
10	5.08	9.50	11.40	8.30	7.30	9.08
PIN	A	B	C	D	E	F

Ordering Information

7100 - M XXX 067 XX F X 0 X

F=Female
 M=Male
 No. of pins
 010=10Pin
 020=20Pin
 ...
 100=100Pin
 Plastic Height
 067=6.7mm
 Contact Plating
 G0:Gold Flash
 G1:3U" Gold
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 SM:Gold Flash/Matte-Tin
 Insulator Material
 Option
 F=BK-LCP
 Packing
 T:Tube
 P:Tube+Cap
 R:Reel+Cap

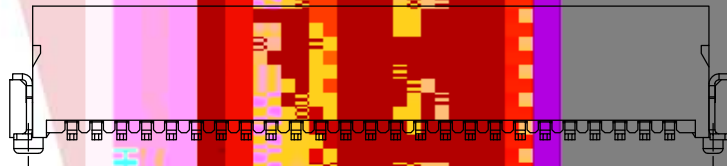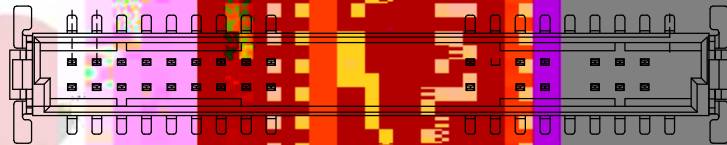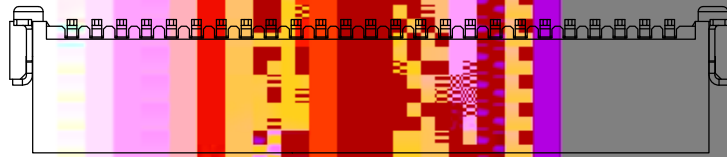

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW

yi yusheng

19.04.21

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.



PART NO.

7100-MXXX067XXFX0X

TITLE:

1.27mm E-type connector NPin
 H6.7 Male

A 2020.04.21 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION CHANGE