

HSF RoHS

SPECIFICATIONS



Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Oper

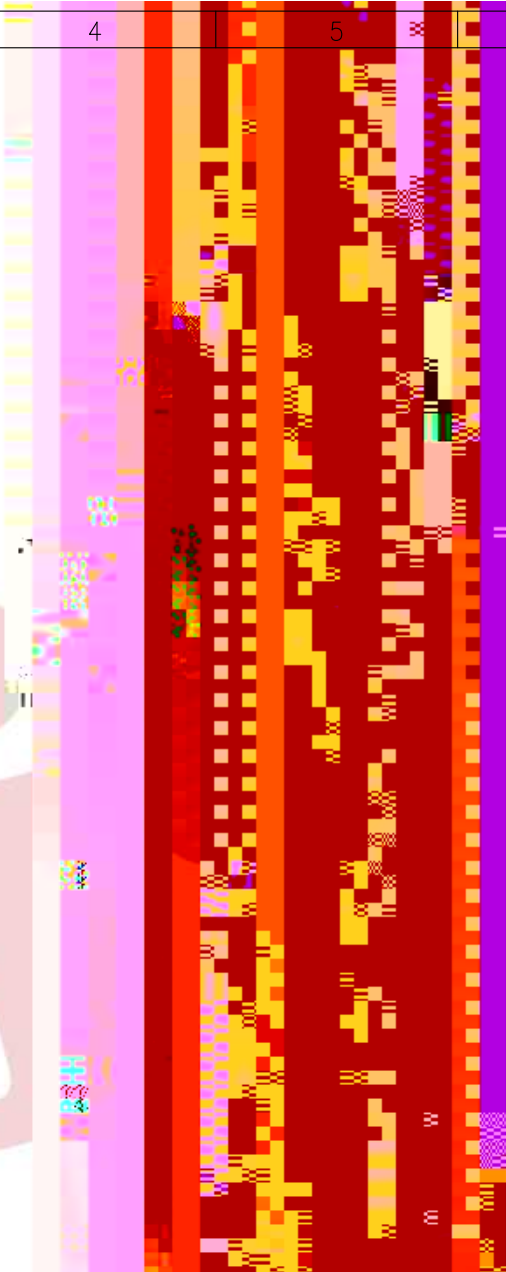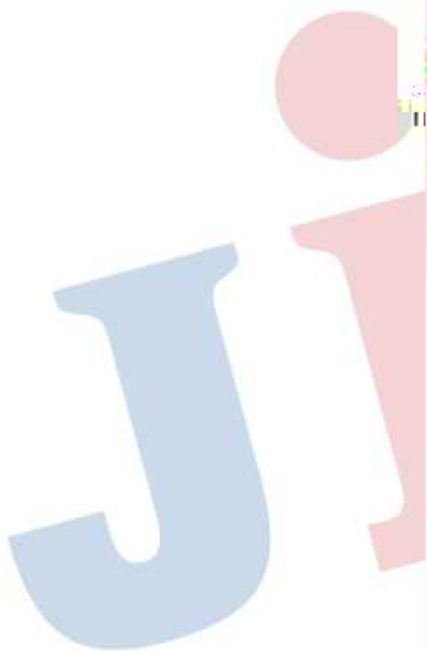

| | | | | | | | | | | |
|---|---|------|--------------------------|--------|-------------|---------|-------|--------|-------------------------------------|---|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| G | <div style="display: flex; justify-content: space-between;"> HSF RoHS SPECIFICATIONS </div> <p>Rated Current:3.0AMP Contact Resistance:20mΩ Max Withstand Voltage:1000V AC/DC Insulation Resistance:1000MΩ Min Oper</p> | | | | | | | | | G |
| F | | | | | | | | | | F |
| E | | | | | | | | | | E |
| D | | | | | | | | | | D |
| C | | | | | | | | | | C |
| B | | | | | | | | | | B |
| A | | | | | OPERATION | SCALE | FIT | | | |
| | | | | | X.X ±0.30 | UNIT | mm | | | |
| | | | | | X.XX ±0.20 | CHECK | SIZE | A4 | PART NO. | |
| | | | | | X.XXX ±0.10 | APPROVE | SHEET | 1/1 | 4410-2XXMXXMEBWOX | |
| | REV | DATE | MODIFICATION DESCRIPTION | CHANGE | DIM | TOL | PROJ. | TITLE: | 2.0加强型金手指连接器 公座 2xNpin H20.2 SMT 带柱 | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |

OPERATION

DRAW

iyusheng

19.07.09

SCALE

FIT

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

Angle

±3'

DIM

TOL

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

☉ ↺

PART NO.

4410-2XXMXXMEBWOX

TITLE:

2.0加强型金手指连接器 公座 2xNpin H20.2 SMT 带柱